

## 特点 Features

标准的2.0 × 1.2 × 0.6mm陶瓷封装表面贴装形式

小公差及高稳定性

适应自动装配的8.0mm宽度的编带包装


包装：每卷3000PCS

Typical 2.0 × 1.2 × 0.6 mm ceramic SMD package

Tight tolerance and Stability

8.0mm width Tape & Reel package for automatic assembly

Packing: Tape & Reel, 3000 pcs per Reel

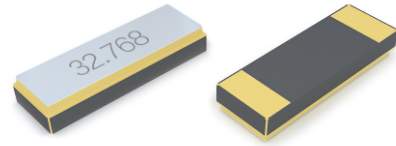

※ 产品表面印字依生产批号决定

## 标准规格 Electronic Specification

型号 Type	SMD2.0*1.2
额定频率 Rated frequency	32.768kHz
调整频差 Frequency Tolerance(at25°C)	± 20ppm ( Type )
工作温度 Operating Temperature Range	- 40°C~+125°C
贮存温度 Storage Temperature Range	- 55°C~+125°C
拐点温度 Inflection point temperature	+25°C ± 5°C
负载电容 Load Capacitance	7pF, 9pF, 12.5pF
激励电平 Dtiwel Level	0.5 μ W ( 1.0 μ W Max. )
频率温度系数 Frequency temperature coefficient	-0.04 × 10 <sup>-6</sup> /°C <sup>2</sup> Max
串联电阻 Equivalent Series Resistance	70k Ω Max.
串联电容 Equivalent Series Capacitance	3.4fF Typ.
静态电容 Shunt Capacitance	1.0pF Typ.
老化率 Aging	± 3 × 10 <sup>-6</sup> /year Max. ( 第一年 )

## 外型尺寸 Outline Dimensions(Unit:mm)

