


特点 Features

标准的3.2 × 1.5 × 0.8mm陶瓷封装表面贴装形式
小公差及高稳定性
适应自动装配的12.1mm宽度的编带包装
包装：每卷3000PCS

Typical 3.2 × 1.5 × 0.8 mm ceramic SMD package
Tight tolerance and Stability
12.1mm width Tape & Reel package for automatic assembly
Packing: Tape & Reel, 3000 pcs per Reel

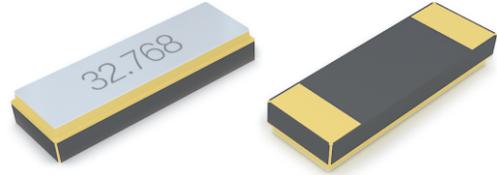

※ 产品表面印字依生产批号决定

标准规格 Electronic Specification

型号 Type	SMD 3.2*1.5
额定频率 Rated frequency	32.768kHz
调整频差 Frequency Tolerance(at25°C)	± 20ppm (Type)
工作温度 Operating Temperature Range	- 40°C~+125°C
贮存温度 Storage Temperature Range	- 55°C~+125°C
拐点温度 Inflection point temperature	+25°C ± 5°C
负载电容 Load Capacitance	6pF, 7pF, 9pF, 12.5pF
激励电平 Drive Level	0.5 μ W (1.0 μ W Max.)
频率温度系数 Frequency temperature coefficient	-0.04 × 10 ⁻⁶ /°C ² Max
串联电阻 Equivalent Series Resistance	70kΩ Max.
串联电容 Equivalent Series Capacitance	3.4fF Typ.
静态电容 Shunt Capacitance	1.2pF Typ.
老化率 Aging	± 3 × 10 ⁻⁶ /year Max. (第一年)

外型尺寸 Outline Dimensions(Unit:mm)

